



HITCH, 2" Receiver, Honda Passport

INSTALLATION INSTRUCTIONS

READ ALL WARNINGS AND INSTRUCTIONS THOROUGHLY BEFORE INSTALLATION

⚠ WARNING: The manufacturer of your vehicle may specify towing capacities lower than the capacities noted below. Never exceed the vehicle manufacturer's recommended towing capacity. Consult your vehicle's owner's manual for the manufacturer's recommended towing capacity for your specific vehicle.

⚠ WARNING: Failure to adhere to the exact torque specifications noted in these installation instructions can result in property damage and/or bodily injury. Failure to follow all specifications and instructions will void the hitch warranty.

NOTICE:

Always use proper tools and safety equipment to ensure a safe and quality installation. Inspection of the trailer hitch should be performed before and after each use to ensure all mounting hardware is tight and related hitch components are secure.

LEVEL OF DIFFICULTY: Easy

Installation difficulty levels are based on the time and effort required. They will vary depending on the installer's expertise. Vehicle condition could be a factor in the level of difficulty for a proper installation.

WEIGHT CARRYING CAPACITY	
Gross Trailer Weight (GTWR)	5,000 LBS
Tongue Weight (TW)	750 LBS

WEIGHT DISTRIBUTING CAPACITY	
Gross Trailer Weight (GTWR)	6,000 LBS
Trailer Weight (TW)	900 LBS

TOOLS REQUIRED			
SAFETY GLASSES	RATCHET	TORQUE WRENCH	22mm SOCKET
6" EXTENSION	TUBULAR WIRE BRUSH	LUBRICANT	M14-1.5 TAP (optional)


INSTALLATION:

1. Locate the three mounting holes on the bottom of each frame rail.
2. Clean the threads of the weld nuts with a lubricant and tubular wire brush. Chasing the threads with an M14-1.5 tap is recommended.
3. Lift hitch into position and secure using the provided 9/16" toothed conical washers (**ITEM 2**) and M14 hex head bolts (**ITEM 1**). The teeth of the conical washers should be mated with the corresponding surface of the hitch's mounting flanges.
4. Using the torque wrench and 22mm socket, torque the M14 fasteners to 89 ft-lb.

THIS SPACE INTENTIONALLY BLANK

See previous page for installation instructions

ITEM	DESCRIPTION	QTY
1	M14x1.5, 40, CL10.9 Hex Head Bolt	6
2	9/16" Conical Toothed Washer	6

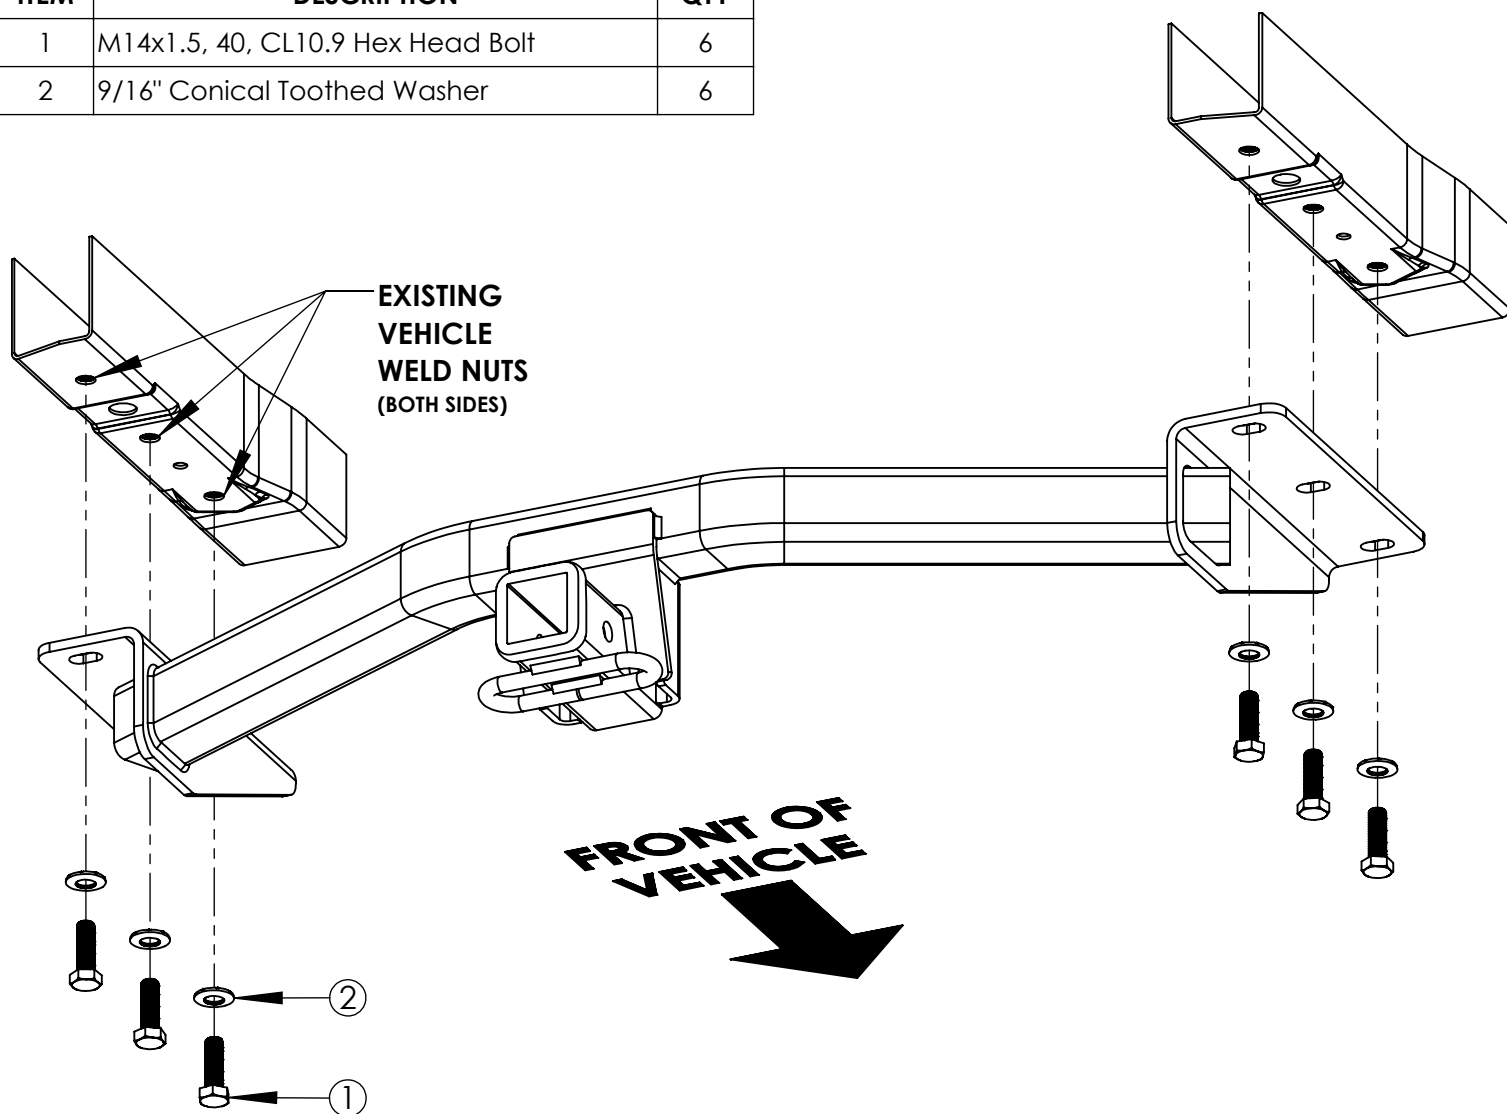

THIS SPACE INTENTIONALLY BLANK