

# Hitch, 2" Receiver, Jeep Grand Cherokee & WK

INSTALLATION INSTRUCTIONS

#### READ ALL WARNINGS AND INSTRUCTIONS BEFORE INSTALLATION

**WARNING:** Never exceed the vehicle manufacturer's recommended towing capacity.

#### NOTICE:

- · Always use proper tools and safety equipment to ensure a safe and quality installation.
- Inspection of the trailer hitch should be performed before and after each use to ensure all mounting hardware is tight and related hitch components are secure.
- ⚠ WARNING: Before you begin installation, read all instructions thoroughly.
- ⚠ **WARNING:** Safety glasses should be worn at all times while installing this product.
- ⚠ WARNING: Failure to adhere to exact torque specifications when securing hardware during the installation process can result in damage to the product or your vehicle. This will void the hitch warranty.

### **LEVEL OF DIFFICULTY: Easy**

Installation difficulty levels are based on time and effort required. They will vary depending on the installer's expertise. Vehicle condition could be a factor in the level of difficulty for a proper installation.

#### WEIGHT CARRYING CAPACITY

Gross Trailer Weight (GTW)	5,000 lb	
Tongue Weight (TW)	500 lb	

### **PARTS LIST**

Item	Qty	Description
1		Uses Existing Vehicle Hardware

**NOTE:** For vehicles with OEM Tow Hook, it must be permanently removed for hitch installation.

# WEIGHT DISTRIBUTION CAPACITY


Weight Distribution (WD)	7,500 lb
WD Tongue Weight (WDTW)	750 lb

### **TOOLS REQUIRED**

Safety Glasses
Ratchet
Torque Wrench


### **PARTS LIST**

Ite	em	Qty	Description
	1		Uses Existing Vehicle Hardware

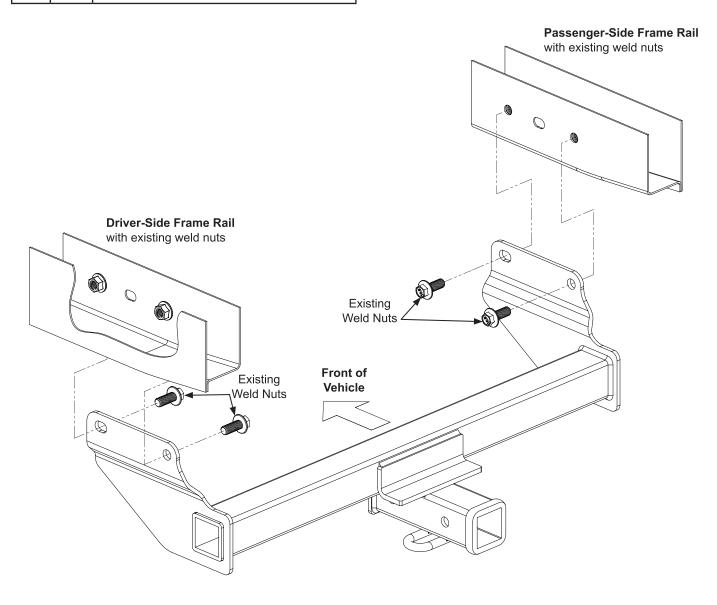

## **INSTALLATION:**

- 1. Remove the (4) existing M14 bolts and keep in current condition. No cleaning is required.
- 2. Lift hitch into position as shown and re-install the fasteners. Scrape any excess caulking on the frame rail if there is interference.
- 3. Tighten all M14 bolts to 115 ft-lbs.





A Winston Products Company TOWSMART.COM WINSTON PRODUCTS, LLC. 30339 Diamond Parkway Cleveland, OH 44139